

### Features

- \* Suitable for flammable working environments.
- \* The valve is actuated by air for accurate response.



### How to order

**SY520**

**02**

**N**

**S**

SY pneumatic valves series

Port size  
02 1/4"

Thread  
Blank G  
N NPT  
R Rc

Pneumatic control  
S Single pneumatic  
D Double pneumatic


5/2 way

### Specifications


Model	SY520-02S	SY520-02D
Port size	1/4"	
Body material	Aluminum alloy	
Fluid	Compressed air	
Effective area	35mm <sup>2</sup>	
Acting	External pilot (2 ~ 8 kgf/cm <sup>2</sup> )	
Operating pressure range	0 ~ 8 kgf/cm <sup>2</sup>	
Proof pressure	9.99 kgf/cm <sup>2</sup>	
Ambient temperature	-10°C ~ 80°C	
Net weight	305g	390g

### Flow chart

Model: SY520-02S





Model: SY520-02D



### Dimensions

#### SY520-02S

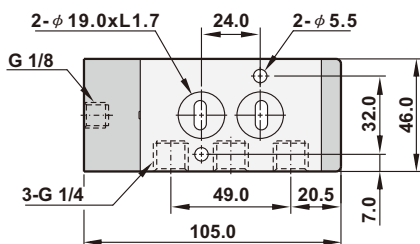

#### SY520-02D

