


# Air Vent With Vacuum Breaker



▲ Stainless Steel Materials

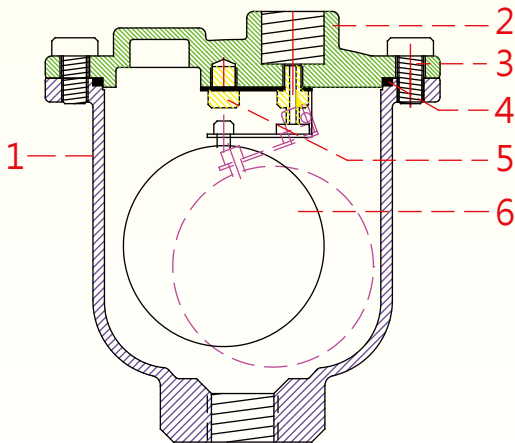


No.	Part Name	Material	
1	Main Body	Cast Iron	SS 304
2	Cover	Cast Iron	SS 304
3	Fixed Bolt	Iron	SS 304
4	Sealing spacer	NBR	NBR
5	Plug	SS 304	SS 304
6	Float ball Set	SS 304	SS 304

- ★ Applied Condition : Water .
- ★ Applied Temperature : -15 °C ~ 80 °C
- ▼ Body Testing Pressure / Working Pressure
  - Cast Iron : 21 kgf/cm<sup>2</sup> / 12 kgf/cm<sup>2</sup>
  - Stainless Steel : 32 kgf/cm<sup>2</sup> / 20 kgf/cm<sup>2</sup>

- When the pipe in negative pressure, the Air Vent can automatically inspire in.
- Air Vent can effectively evacuate the air in the pipe to reduce the noise or the interference caused by the air.
- Suggest to install at the highest location of the pipe for air relief. Only vertical installation available.
- Suggest to install an isolation valve in front of the Air Vent for easy maintenance in case.

Model : ATR (Threaded)



Size	H	D
1/2"	131	120
3/4"	131	120
1"	131	120
1 1/2"	210	190
2"	210	190

Unit : mm

★ No 1.5" 、 2" Valve in stainless steel

