

Queen

Kick pilot operated solenoid valves normally closed, energized to open




MK-40S-M20

Features:

1. Suitable for Steam, Air, Vacuum, Inert gases, Water, and Oil (Below 50cst).
2. Kick pilot operated, wide operating pressure range from 10 TORR to 10kg*f/cm², fast response, long life constructive device.
3. Can be mounted in vertical position or vertical ± 15° is allowed.
4. Fluid temperature from m -10 °C (none freezing) to 180°C.

Model	Connection	Orifice (mm)	Cv Value	Operating pressure (kg*f/cm ²)			Max. Media Temp.	Power Consumption VA
				Steam	Water	Oil (Below 50cst)		
MK-32S-M20	PT 1 1/4"	33	13	0-10	0-8	0-7	180 °C	48
MK-32FS-M20	Flange 1 1/4"							
MK-40S-M20	PT 1 1/2"	43	18					
MK-40FS-M20	Flange 1 1/2"							
MK-50S-M20	PT 2"	53	23					
MK-50FS-M20	Flange 2"							

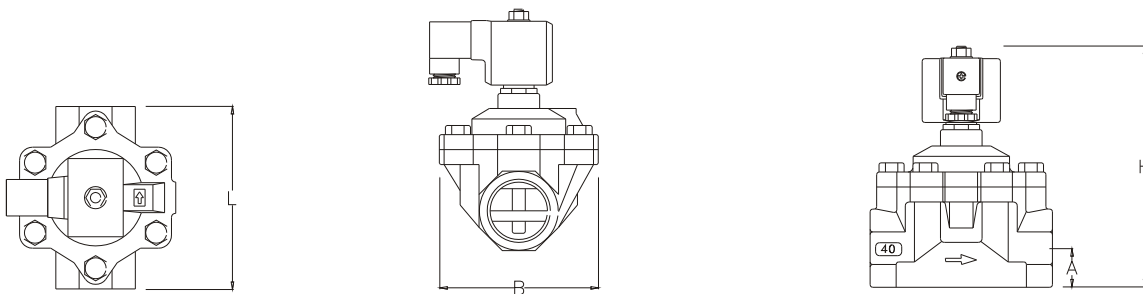

Model	Connection	L (mm)	H (mm)	A (mm)	B (mm)
MK-32S-M20	PT 1 1/4"	125	179	27	102
MK-40S-M20	PT 1 1/2"	140	184	31	122
MK-50S-M20	PT 2"	160	198	37	132

Model	Connection	L (mm)	H (mm)	M (mm)	∅C (mm)	∅K (mm)	∅h (mm)
MK-32S-M20	Flange 1 1/4"	172	215	13	100	35	135
MK-40S-M20	Flange 1 1/2"	180	222	14	105	42	140
MK-50S-M20	Flange 2"	180	238	14	120	54	155

