




COIL 30mm
Spade terminals (DIN 46340)
Form A

ZA10A

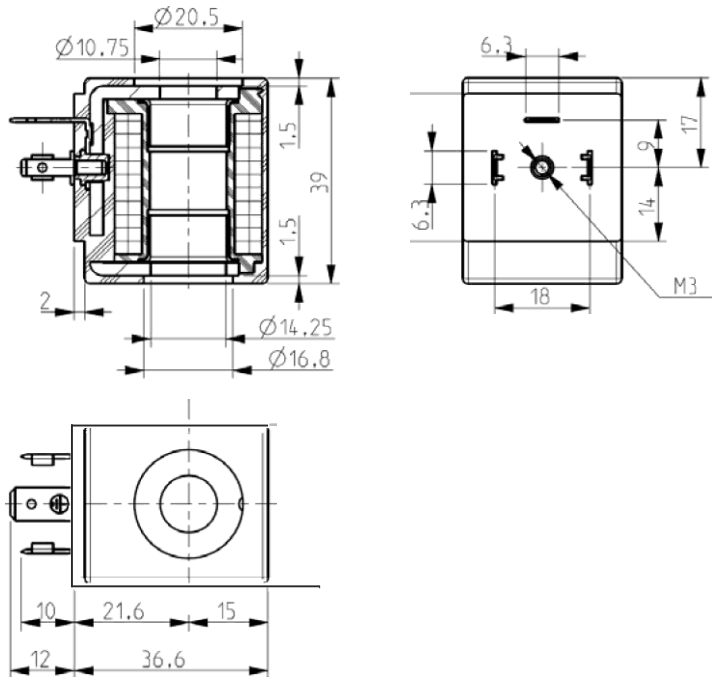

GENERAL FEATURES

Complying with 2014/35/EU (LVD) and 2014/30/EU (EMC) directives.
Product in accordance with the RoHS 2 directive.
100% inspected.

ELECTRIC CONNECTIONS

Spade terminals 6,3 x 0,8 (DIN 46340), 2 line + 1 earth terminals.
3 poles plug connector (EN175301-803).

ENCAPSULATION MATERIALS

PPS (Polyphenilsulfure) fiberglass reinforces

TECHNICAL FEATURES

Approval "UL Recognized" (class F)
 Continuous duty ED 100%
 Insulation class F (155°C) — H (180°C)
 Ambient temperature Class F: -10°C +50°C
 Class H: -10°C +80°C

Protection degree IP 67 (EN 60529) with plug connector
 Voltages DC 12-24V (+10% -5%)
 AC 24V/50Hz -115V/50Hz -230V/50 (+10% -15%)
 For the complete voltage list, see overleaf

TYPE		POWER ABSORPTION			NOTES	WEIGHT(*9)
		AC (VA)		DC (W)		
BASIC CODE	CLASS/VOLTAGE CODE	Inrush	Holding			
ZA10A		23	14	9		0,130

IMQ certified valve bodies (L113 — L120 — L121 — L122 — L123 — L127 — 133 — L134 — L140 — L182 — L191 — L208 — L256 — L257 — L282 — L320 — L321 — L323 — L334 — L621 — L893 — L898 — L957 — L962 — L993 — D105 — D136 — D644 — D605)