

3/2 DIRECT ACTING SOLENOID VALVE

TYPE	PRESSURE	UNI	TYPE	PRESSURE	NO	TYPE	PRESSURE	NC
30301	0 - 14 bar		30201	0 - 20 bar		30125	0 - 20 bar	
30310	0 - 32 bar		30206	0 - 63 bar		30126	0 - 63 bar	


FEATURES

- Bubble tight shut off
- Mounts in any position
- Suitable for vacuum up to 10⁻⁶ torr
- Vibration resistance up to 9g
- Suitable for high speed cycling
- Speed up to 1000 cycles/ min
- Life >10 million cycles
- Manual override optionally provided



WETTED PARTS

Code	✳	B2	B5
Body	Anodized Aluminium	Brass	SS 316
Internals	Aluminium	Brass	SS 316
Guide Assembly	SS 304		
Shadow-Ring	Copper/ Silver/ None		
Plunger, Insert	SS 430		
Spring	SS 302		
Seat, Seals	NBR, Viton, EPDM		

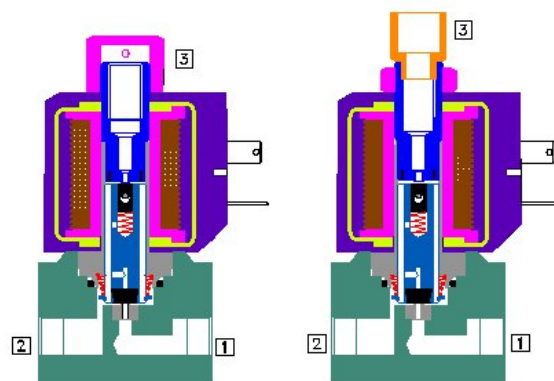

AMBIENT AND FLUID TEMPERATURE

-30 °C to 75 °C

SPECIAL VERSION AND SUFFIX

Suffix : (Valve) OX, AM
Special version : (Coil) CO, FR, SS, LC, III, TM

MEDIA

Air, Inert Gases, Water

APPLICATION

Single acting actuator/ Cylinder/ control valve actuation
Diverting/ mixing of fluid

PORT CONNECTION

FUNCTION	INLET	OUTLET	EXHAUST
NC	1	2	3
NO	3	2	1
Mixing	1 and 3	2	
Diverting	2	1 and 3	

- Contact Rotex for
- Any other ambient, fluid temperature, media and application
 - UL listed, Listed general purpose Valve
 - Media like Water, Light Oil etc.

SPARES

(Refer page 25 for ordering code)

SPARE KIT	CODE
Seal Kit : Oring Set and Plunger Assembly	98
Repair Kit : Oring Set, Plunger Assembly, Springs, Manual Override, Guide Assembly	99
Solenoid Kit : Solenoid, Gasket and Nut	34

APPROVAL

(✳ applied for)

Approval	TYPE 4X, 6P	IP67	Ex d IIC T4 or T5 or T6 IP66	Ex ia IIC T6 IP67	DGMS	CCOE
		✓	✓	✓	✓	✓
		✓	✓	✓		
	✓		*			
			✓	✓		
			✓	✓		
			✓	✓		



3/2 DIRECT ACTING SOLENOID VALVE

SPECIFICATION

PORT CONNECTION		PRE-SSURE bar		ORIFICE (mm)	FLOW FACTOR kv (LPM OF WATER @ 1 bar ΔP)	VALVE TYPE	PILOT PRESSURE	BODY MATERIAL AND INTERNALS					SEALS					MANUAL OVERRIDE		SOLENOID ENCLOSURE				SUFFIX		POWER VA		CONSTRUCTION REFERENCE NUMBER
SIZE	BSP(F)	NPT(F)	MINIMUM					MAXIMUM	ALUMINIUM	ALUMINIUM + SS	BRASS (STD. PORT NPT)	SS 316 (STD. PORT NPT)	NBR	Viton	EPDM	HYTREL	PTFE+Viton	NIL	STAYPUT CUM MOMENTARY	MOMENTARY	FLYING LEAD	PLUG IN, IP67	SQ. PLUG IN, IP67	TERMINAL BOX IP67	EXPLOSION PROOF IIC, IP67	LARGE ENCLOSURE	SOLENOID SIZE	

3/2 UNIVERSAL

1/8" / 1/4" / 3/8" / 1/2"	1G / 2G / 3G / 4G	1R / 2R / 3R / 4R	0 1.5 3 4 30301	*	B2 B5	*	S2 S1		*	M6 M8	F	22 25	T E	III	14	✓	✓	18 12	8	I
			0 3.5 4 7 30310	*	B2 B5	*	S2 S1	S8	*	M6 M8	F	25	T E		18	✓	✓	13 13	13	K
			0 4 2.5 3.5 30301	*	B2 B5	*	S2 S1		*	M6 M8	F	22 25	T E	III	14	✓	✓	18 12	8	I
			0 5 2.2 2.5 30301	*	B2 B5	*	S2 S1		*	M6 M8	F	22 25	T E	III	14	✓	✓	18 12	8	I
			0 5 3.5 5 30310	*	B2 B5	*	S2 S1	S8	*	M6 M8	F	25	T E		18	✓	✓	13 13	13	K
			0 8 3 4 30310	*	B2 B5	*	S2 S1	S8	*	M6 M8	F	25	T E		18	✓	✓	13 13	13	K
			0 10 1.6 1.4 30301	*	B2 B5	*	S2 S1		*	M6 M8	F	22 25	T E	III	14	✓	✓	18 12	8	I
			0 10 2.5 3.5 30310	*	B2 B5	*	S2 S1	S8	*	M6 M8	F	25	T E		18	✓	✓	13 13	13	K
			0 12 2.2 2.5 30310	*	B2 B5	*	S2 S1	S8	*	M6 M8	F	25	T E		18	✓	✓	13 13	13	K
			0 14 1.2 0.7 30301	*	B2 B5	*	S2 S1		*	M6 M8	F	22 25	T E	III	14	✓	✓	18 12	8	I
			0 16 1.8 1.8 30310	*	B2 B5	*	S2 S1	S8	*	M6 M8	F	25	T E		18	✓	✓	13 13	13	K
			0 32 1.2 0.7 30310	*	B2 B5	*	S2 S1	S8	*	M12 M5	F	25	T E		18	✓	✓	13 13	13	K
			0 8 1.8 1.8 30301	*	B2 B5	*	S2 S1		*	M6 M8	F	22 25	T E	III	14	✓	✓	18 12	8	J

7

Cable Entry	T	E	
M20 x 1.5	FJ	HU	iiTÜ
M25 x 1.5		ii	iiSVTÜ
1/2" NPT	Fİ	Hİ	iiPÜ

* = Do not specify when opted for. Refer Page # 22 for Value of *
 ✓ = Options available

Code	Construction Reference
I	309, 311
J	310, 312
K	313, 315
L	314, 316

ORDERING CODE AND EXAMPLE VALVE + SOLENOID

TYPE - SUFFIX - ORIFICE - PORT CONNECTION - BODY AND INTERNALS - MANUAL OVERRIDE - SEAL + SIZE - VOLTAGE - CURRENT - SOLENOID ENCLOSURE - SPECIAL VERSION - POWER - INSULATION - APPROVAL
 e.g. 30125-1.8-2G+I-24V DC-22; 30301-1.6-2R-B5-S1+III-220V DC-37-H

