




2/2 Way Direct Acting N.C. Plunger Series

Opening: 5~20ms **Closing:** 10~40ms



Ambient Temp. °C -15~50

Media Temp. °C


Coil No.	#4	#5	#3E
AC (VA)	19.5	23.0	9.2
Final Temp. °C	80.0	85.0	63.0
DC (W)	15.0	18.5	10.0
Final Temp. °C	103	95.0	80.0

	#4	#5	#3E
N:NBR	-5~80		
J:EPDM	-10~90	-10~145	
V:FKM			

SPECIFICATIONS: Forged Brass Body, for Water, Air, Vacuum, Light Oil etc.

CODE (PIPE)	FIG. NO.	Orifice mm	Seal	COIL	Max. O.P.D. (Min. 0 bar)						Vacuum torr				CV	
					#4		#5		#3E		#4		#5			
					AC	DC	AC	DC	AC	DC	AC	DC	AC	DC	AC	DC
10 (3/8")	A	15	N J V	#4	1.0	0.5	1.5	1.0	0.3		1	400	—	1	0.18	0.22
15 (1/2")	B			#3E	0.5	0.2	1.0	0.5	0.2		400	—	1	400	0.24	0.28

TYPE INDICATION: (□ means standard)

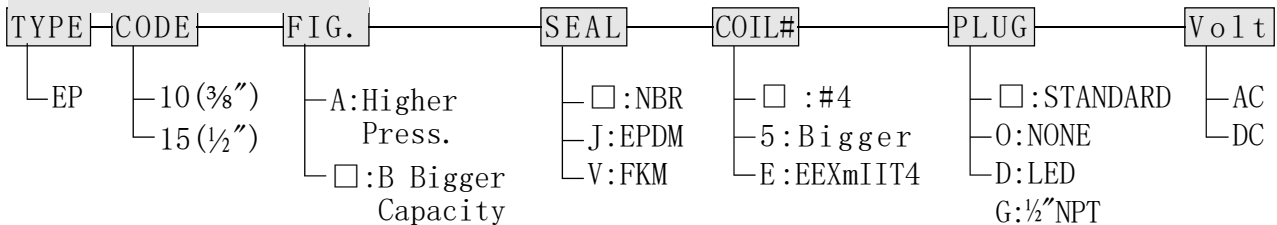

* Explosion-Proof coil can not with LED Plug.

Examples:

Example 1: EP10-V-D AC220V

TYPE EP, 3/8" Pipe, FKM Seal, Nass #4 Coil, With LED Plug, AC220V


Example 2: EP15-A-5 DC24V

TYPE EP, 1/2" Pipe, Higher Press., NBR Seal, Nass #5 Coil, Standard Plug, DC24V

DIMENSIONS/Weight:

TYPE	Size:mm							NET WEIGHT:kg			
	L	W			H	C	D	M	#4	#5	#3E
		#4	#5	#3E							
10 (3/8")	55	38			96	83	24	M4	0.45	0.53	0.76
15 (1/2")									0.44	0.52	0.75

DIMENSIONED DRAWING:

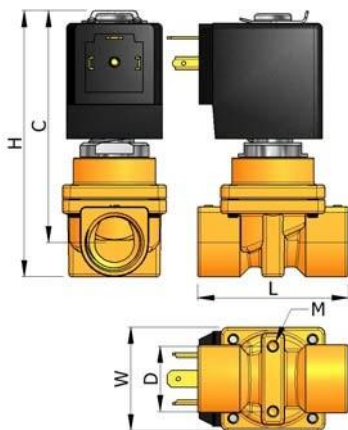

OPTION: Bracket

