



3/2 Way N.C. Plunger Series
Direct Acting Solenoid Valve
Opening 5~20ms, Closing 10~40ms




ISO 9001 Certificate




ZT
0711

FUNCTION 1



FUNCTION 2

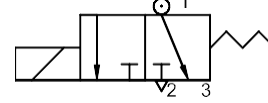


Coil#	4	5	ATEX	
AC (VA)	15.4	23.0	9.2	
Final Temperature°C	80	85	50	
DC (W)	15.0	18.5	10.0	
Final Temperature°C	95	95	70	

SPECIFICATIONS Forged Brass Body. For Water, Steam, Air, Gas, Light Oil.

PIPE	ORIFICE mm			SEAL	COIL	TEMP. °C			MAX. O.P.D. 0 bar						CV	torr
	FIG. NO	BODY	TOP			#4 /5/3E			FUNCTION							
						N	V	Z	#4		#5		#3E			
03 (1/8)	1	1.3	1.6	N	4				10		13		10		0.08	10 ⁻²
	2	1.6							7	13	10	16	7	13		
06 (1/4)	3	2.0	2.0	V	5	-5	-10	-20	5		7		5		0.15	10 ⁻²
	4	2.5							4	10	5	13	4	10	0.20	
08 (3/8)	5	3.0	2.0	V	5	/	/	/	3		4		3		0.31	10 ⁻²
	6	4.0							2	7	3	10	2	7	0.54	
15 (1/2)*	7	5.0	2.8	Z	3E	80	145	145	1		2		1		0.80	10 ⁻²
									5		2	7	1	7		

TYPE INDICATION

TYPE — CODE — FIG. NO — SEAL MAT' L — EXH. ACCESS. — COIL# — PLUG — VOLTAGE

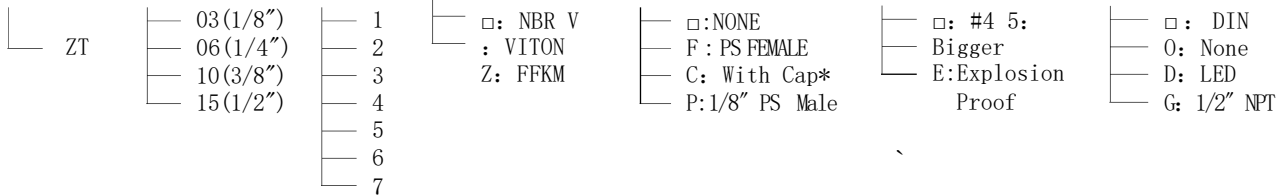

TYPE	L	W: mm		H	A	B	N. W: kg		
		#4	#5				#4	#5	#3E
ZT03/06	41.0	32.0	36.0	74.4	9.0	M3	0.36	0.44	0.67
ZT10	52.0			81.0	12.5	M4	0.44	0.52	0.75
ZT15				0.42	0.50	0.73			

☆Material for C: PA

E-mail: sales@solenoid-valves.com

<http://www.solenoid-valve.world>

