


Media: air – water – oil - vacuum
 Pressure range: 0 to 300 Bar max
 Media temperature: -20°C to +100°C
 Ambient temperature: -30°C to +50°C
 Media viscosity: 500 centistokes max
 Weight: 4000g
 Opening Closing time: 29 – 200mSec



2/2 Steel

1/8 – 3/8 COAXIAL

N/CLOSED & N/OPEN

2 WAY DIRECT ACTING

0 - 300 Bar

TYPE 267



PRESSURE

Port BSP	Ø Orifice (mm)	Flow Kv L/min	Pressure Rating (Bar)		Body Material	Part Number	
			Min	Max			
				P→A			A→P
1/8	1.0	0.7	0	300	100	Galvanised Steel	267A1S1 + port + voltage
	2.0	1.9	0	300	50		267A2S1 + port + voltage
	2.5	2.7	0	300	30		267A3S1 + port + voltage
	3.0	4.6	0	270	24		267A4S1 + port + voltage
	4.0	7.3	0	135	9		267A5S1 + port + voltage
	5.0	8.2	0	90	3		267A6S1 + port + voltage
	6.0	10.7	0	60	2		267A7S1 + port + voltage
1/4	1.0	0.7	0	300	100	Nickel Plated Steel	267A1S2 + port + voltage
	2.0	1.9	0	300	50		267A2S2 + port + voltage
	2.5	2.7	0	300	30		267A3S2 + port + voltage
	3.0	4.6	0	270	24		267A4S2 + port + voltage
	4.0	7.3	0	135	9		267A5S2 + port + voltage
	5.0	8.2	0	90	3		267A6S2 + port + voltage
	6.0	10.7	0	60	2		267A7S2 + port + voltage

OPTIONS

Normally Open version (267B)
 Fastening Brackets (Steel Zinc plated)
 Oil and Grease free
 Other options available upon request – NPT thread – 3/8 thread – special connector



ELECTRICAL DATA

Voltage (-10% + 10%) Continuous duty 100%		Power Consumption (Watts)	Insulation class	Enclosure	Electrical connections
~	12 - 24 - 48 - 110 - 230 (Connector with rectifier)	58	F 155°C	IP 65 with connector	3 spades DIN 43650 DIN 40050 VDE 0110
=	12 - 24 - 48 - 110 - 230 (DC)	55			

CONSTRUCTION

Body: Steel (S1 galvanised or S2 nickel plated)
 Tube and internal parts: Stainless steel
 Seals: FKM static, PTFE Dynamic

OVERALL DIMENSIONS

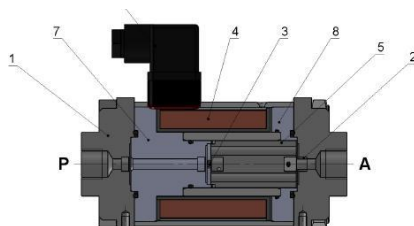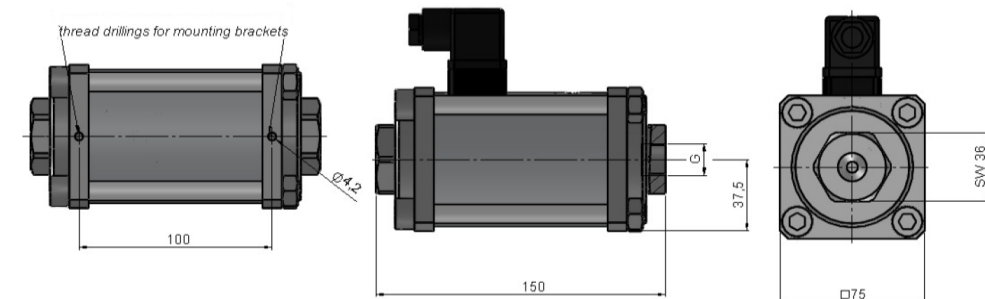

1	Adaptor	5	Plunger
2	Nozzle	6	Plug
3	Spring	7	Solenoid Core
4	Coil	8	Solenoid Cover