




2/2 WAY N.O. PLUNGER SERIES SOLENOID VALVE

RC2108

- ★ IP65 100% ED Coil
- ★ PTB Approval EExmIIT4 Coil



POWER CONSUMPTION

COIL	2	2E	4	5	3E
AC(VA)	8.5/6.9	4.8	17.6/15.4	33/23	9.2
DC(W)	4.9	5.2	15	18.5	10



TYPE RB: Mini Brass Body, 2/2 Way N.O., For Water. Air. Gas. Light Oil.

CODE (PIPE)	FIG. NO.	Material		Coil	orifice mm	Temp. (°C)			Working Press. bar		Cv	VAC. torr	
		Seal	Body			Coil 2 / 2E			Coil 2	Coil 2E			
						N	J	V					
03(1/8") 06(1/4")	1	N. J. V.	C	2	1.3	-5~80	-10~80			0~10	0~10	0.05	-2 10
	2			2E	1.5								


TYPE RC: Brass Body, 2/2 Way N.O., For Water. Air. Gas. Light Oil.

CODE (PIPE)	FIG. NO.	Material		Coil	orifice mm	Temp. -5 ~ °C						Working Press. bar			Cv	VAC. torr
		Seal	Body			Coil 4 / 3E			Coil 5			Coil 4	Coil 5	Coil 3E		
						N	J	V	N	J	V					
03(1/8") 06(1/4") 10(3/8")	1	N J V	C S*	4 5 3E	1.6	90 120 90 150						0~16	0~24	0~16	0.10	-3 10 -2 10
	2				2.0							0~13	0~20	0~13	0.15	
	3				2.2							0~10	0~16	0~10	0.17	
	4				2.5							0~7	0~10	0~7	0.20	
	5				3.0							0~5	0~7	0~5	0.31	

* S.S. body is available.

TYPE INDICATION

TYPE	CODE	FIG.	SEAL MAT'L	BODY MAT'L	COIL	PLUG	VOLTAGE
RB	03	1	N: NBR	C: Brass	2	□: DIN	
RC	06	2	J: EPDM	S: S.S.	3	D: LED	
	10	3	V: VITON		2E	G: 1/2"NPTF	
	15	4			4	Y: 2 Wires	
		5			5		
				3E			

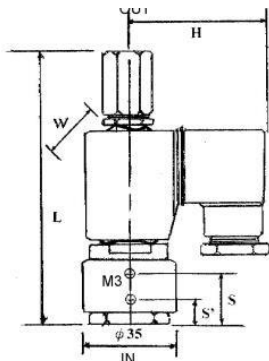

DIMENSION

	mm				
TYPE	RB		RC		
CODE	03	06	03	06	10
L	70		105		
H	55		60		
W	22/30		30/36		
S	-		17		
S'	-		10		
N.W. (kg)	0.20		0.45		

Connexion Developments Ltd

Tel: +44 (0) 1454 334 990; Fax: +44 (0) 1454 326 390

E-mail: sales@solenoid-valves.com

<http://www.solenoid-valve.world>

ISO 9001
Certificate

