


### Symbol



### Features

1. Easy operation.
2. Large flow rate.
3. Suitable for vacuum operation.
4. Mounting bracket as optional accessory.


### How to order

<b>TSV8753</b> - <b>02</b> <b>N</b> <b>M</b>	<b>Port size</b>	<b>Thread</b>	<b>Acting</b>
5/3 Way	02:1/4" 03:3/8" 04:1/2"	Blank:G N :NPT R :Rc	S :Spring return M :Detent SX :Exhaust center, Spring return MX :Exhaust center, Detent

### Specifications

Model	TSV8753-02M(S)	TSV8753-03M(S)	TSV8753-04M(S)
Port size	1/4"	3/8"	1/2"
Body material		Aluminum alloy	
Fluid		Compressed air	
Sectional area	18mm <sup>2</sup>	35mm <sup>2</sup>	38mm <sup>2</sup>
Operating pressure range		0 ~ 9 kgf/cm <sup>2</sup>	
Proof pressure		10 kgf/cm <sup>2</sup>	
Ambient temperature		-10°C ~ 60°C	

### Flow chart

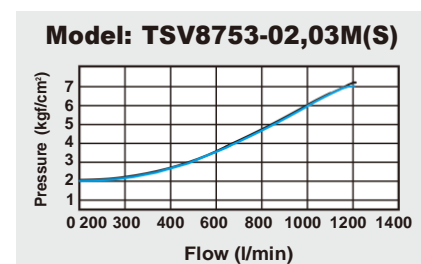

### Dimensions

