


CS FLUID POWER CO., LTD.

Solenoid Coil

Model: **WP-A3-C******

While installing please be sure that this side is toward to the valve body. ※Fly Leads:300mm

Unit: mm

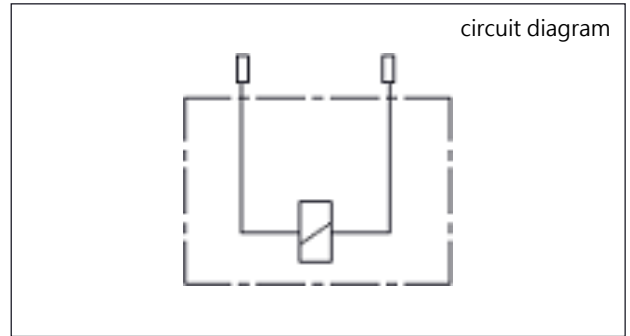

TECHNICAL DATA	
Wt.: 220VAC 170 g 240VAC 184 g	
Insulation Class H: 311°F (180°C)	
Ambient Temp. Range: -4 ~ + 140°F (-20 ~ +60°C)	
Approval Mark:	
Notes: Voltage drop range is within ±10%.	

1	VOLTAGE:
AC	220,240

2	PLUG: None
3	Waterproof: IP 54
4	Housing and Washer weight: 128 g

CODE ****	Voltage	Resistance Ω $\pm 3\%$ 20~25 °C	Power consumption		Wire color
			Current A	Watt	
A220	AC220	232	50Hz/ 0.14A 60Hz / 0.11A	50Hz / 12.4W 60Hz / 10.3W	RED+RED
A240	AC240	216	50Hz/ 0.20A 60Hz / 0.15A	50Hz / 17.8W 60Hz / 14.3W	RED+RED