


CS FLUID POWER CO., LTD.

Solenoid Coil

Model: **WP-A3-C******

While installing please be sure that this side is toward to the valve body. ※Fly Leads:300mm

Unit: mm

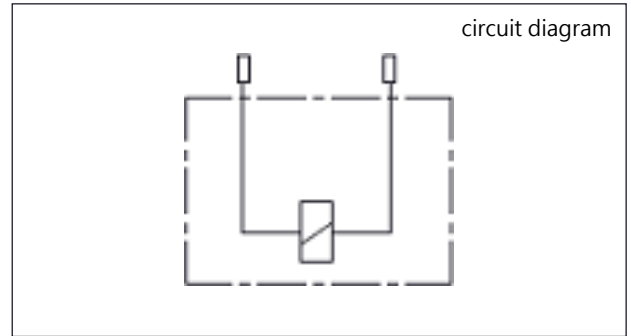

TECHNICAL DATA	
Wt.: 24VAC	124 g
110VAC	270g
Insulation Class H:	
311°F	(180°C)
Ambient Temp. Range:	
-4 ~ + 140°F	(-20 ~ +60°C)
Approval Mark:	
Notes: Voltage drop range is within ±10%.	

1	VOLTAGE:
AC	24,110

2	PLUG: None
3	Waterproof: IP 54
4	Housing and Washer weight: 128 g

CODE ****	Voltage	Resistance Ω $\pm 3\%$ 20~25 °C	Power consumption		Wire color
			Current A	Watt	
A024	AC24	2.1	50Hz / 2.42A 60Hz / 1.83A	50Hz / 27.5W 60Hz / 20.3W	BLACK+RED
A110	AC110	30	50Hz / 0.61A 60Hz / 0.46A	50Hz / 24.8W 60Hz / 19.3W	BLUE+BLUE